DEEPA®

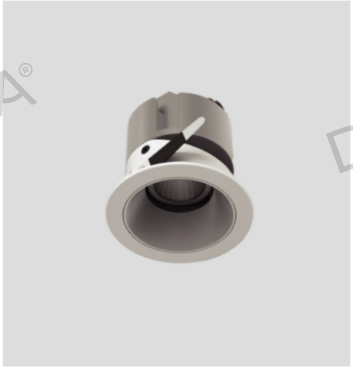

DP-RMSC-LG15

# ELGA

## Luminaire Information

| | |
|---|---|
| System power | 15W |
| CCT | 2700K, 3000K, 4000K, 5000K, 6500K |
| CRI / Ra | ±90Ra |
| Fixture lumen output | 1350lm |
| Material | Aluminum |
| Surface finish | Powder coating |
| Optics | Lens (15°, 24°, 36°) |
| UGR level | <21 |
| Installation | Recessed |
| IP rate | IP20 |
| Fixture | Adjustable |

## Light Engine Information

| | |
|---|---|
| LED type | COB (Bridgelux) |
| LED voltage | 36V |
| SDCM | 2 SDCM / 3 SDCM |

## Driver Information

| | |
|---|---|
| Driver type | Remote |
| Input voltage | 220-240 VAC |
| Output voltage | 30-42 VDC |
| Output current | 350mA |
| Dimming system | ON-OFF / TRIAC / 1-10V / DALI |

## Product Dimension




## Color Option

All black

All white

## Light Throw

DP-RMSC-LG15 3000K 90Ra




| h(m) | E(lx) | D(cm) |
|---|---|---|
| 1 | 5634 | 30 |
| 2 | 1408 | 60 |
| 3 | 626 | 90 |
| 4 | 352 | 121 |




| h(m) | E(lx) | D(cm) |
|---|---|---|
| 1 | 3394 | 43 |
| 2 | 848 | 87 |
| 3 | 377 | 131 |
| 4 | 212 | 175 |




| h(m) | E(lx) | D(cm) |
|---|---|---|
| 1 | 1693 | 65 |
| 2 | 423 | 131 |
| 3 | 188 | 196 |
| 4 | 105 | 262 |