

RECESSED MOUNTED SPOTLIGHT

ARTISAN

DEEPA®




DP-RMSA-ER5/6

ERAS SMALL


Luminaire Information

System power	5W / 6W
CCT	2700K, 3000K, 3500K, 4000K
CRI / Ra	±90Ra / ±95Ra
Fixture lumen output	350lm
Material	Aluminum
Surface finish	Powder coating
Optics	Lens (15°, 24°, 36°)
UGR level	<19
Installation	Recessed
IP rate	IP20, IP54
Fixture	Fixed / Adjustable

Product Dimension

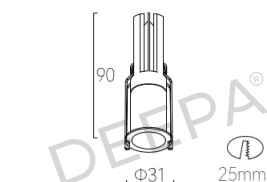

DP-RMSA-ER5/6
Fixed

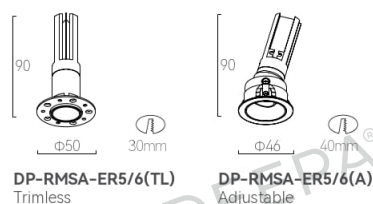

DP-RMSA-ER5/6(TL)
Trimless

DP-RMSA-ER5/6(A)
Adjustable

Light Engine Information

LED type	COB
LED voltage	36V
SDCM	2 SDCM / 3 SDCM

Driver Information


Driver type	Remote
Input voltage	220-240 VAC
Output voltage	30-42 VDC
Output current	150mA
Dimming system	ON-OFF / TRIAC / 1-10V / DALI

Accessories



Honeycomb Louver Linear Spread Filter IP54 Filter

Color Option




Sandy Black Sandy White Sandy Gold Chrome Black Specular Brushed Silver Brushed Bronze Brushed Gold Brushed Black


Light Throw

DP-RMSA-ER5/6 3000K 90Ra

	h(m)	E(lx)	D(cm)
1	904	48	
2	226	96	
3	100	145	
4	56	193	



	h(m)	E(lx)	D(cm)
1	753	56	
2	188	113	
3	83	169	
4	47	226	



	h(m)	E(lx)	D(cm)
1	604	61	
2	151	123	
3	67	185	
4	37	247	

