





DP-RMSA-ER8/10

Product Dimension



DP-RMSA-ER8/10
Fixed

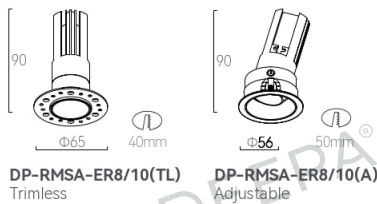

DP-RMSA-ER8/10(TL)
Trimless

DP-RMSA-ER8/10(A)
Adjustable

ERAS MEDIUM

Luminaire Information

System power	8W / 10W
CCT	2700K, 3000K, 3500K, 4000K, TUNABLE WHITE
CRI / Ra	±90Ra
Fixture lumen output	600lm / 800lm
Material	Aluminum
Surface finish	Powder coating
Optics	Lens (15°, 24°, 36°, 55°)
UGR level	<19
Installation	Recessed
IP rate	IP20, IP54
Fixture	Fixed / Adjustable

Light Engine Information

LED type	COB
LED voltage	36V
SDCM	2 SDCM / 3 SDCM

Driver Information

Driver type	Remote
Input voltage	220-240 VAC
Output voltage	30-42 VDC
Output current	180mA / 250mA
Dimming system	ON-OFF / TRIAC / 1-10V / DALI

Accessories




Honeycom
Louver

Linear Spread Filter

IP54 Filter

Color Option



Sandy
Black

Sandy
White

Sandy
Gold

Chrom
Black

Specu

Brush
Silver

Brush
Bron

Brush
Gold

Brushed
Black


Light Throw

DP-RMSA-ER8/10


3000K 90Ra




	h(m)	E(°)	D(cm)
1		1960	43
2		490	87
3		217	131
4		122	175



h(m)	E(lx)	D(cm)
1	1417	51
2	354	103
3	157	155
4	88	207



h(m)	E(lx)	D(cm)
1	918	72
2	229	144
3	102	217
4	57	289



h(m)	E(lx)	D(cm)
1	420	109
2	105	219
3	46	329
4	26	439