

RECESSED MOUNTED SPOTLIGHT


COMMERCIAL

DEEPA®



DP-RMSC-FR10-3

Product Dimension

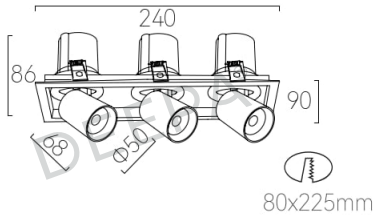

FORCE

Luminaire Information

System power	3*10W
CCT	2700K, 3000K, 3500K, 4000K, 5000K
CRI / Ra	±90Ra / ±95Ra
Fixture lumen output	3*700lm
Material	Aluminum
Surface finish	Textured powder coating
Optics	Lens (15°, 24°, 36°, 45°)
UGR level	<19
Installation	Recessed
IP rate	IP20
Fixture	Adjustable

Light Engine Information

LED type	COB
LED voltage	36V
SDCM	2 SDCM / 3 SDCM

Driver Information

Driver type	Remote
Input voltage	220-240 VAC
Output voltage	30-42 VDC
Output current	3*250mA
Dimming system	ON-OFF / TRIAC / 1-10V / DALI / BLUETOOTH

Color Option




Black White


Light Throw

DP-RMSC-FR10-3 3000K 90Ra


	h(m)	E(lx)	D(cm)
1	2961	33	
2	740	66	
3	329	98	
4	185	131	



	h(m)	E(lx)	D(cm)
1	2220	44	
2	555	87	
3	247	131	
4	139	174	



	h(m)	E(lx)	D(cm)
1	1137	63	
2	284	127	
3	126	190	
4	71	253	



	h(m)	E(lx)	D(cm)
1	776	82	
2	194	163	
3	86	245	
4	49	326	

