




DP-RMSC-FR15-2

Product Dimension

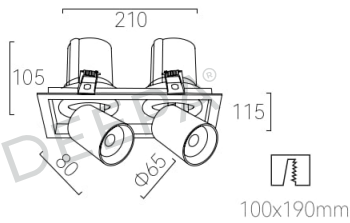

FORCE

Luminaire Information

System power	2*15W
CCT	2700K, 3000K, 3500K, 4000K, 5000K
CRI / Ra	±90Ra / ±95Ra
Fixture lumen output	2*1000lm
Material	Aluminum
Surface finish	Textured powder coating
Optics	Lens (15°, 24°, 36°, 45°)
UGR level	<19
Installation	Recessed
IP rate	IP20
Fixture	Adjustable

Light Engine Information

LED type	COB
LED voltage	36V
SDCM	2 SDCM / 3 SDCM

Driver Information

Driver type	Remote
Input voltage	220-240 VAC
Output voltage	30-42 VDC
Output current	2*350mA
Dimming system	ON-OFF / TRIAC / 1-10V / DALI / BLUETOOTH

Color Option




Black White


Light Throw

DP-RMSC-FR15-2 3000K 90Ra


	h(m)	E(1x)	D(cm)
1	6488	26	
2	1622	51	
3	721	77	
4	406	103	



h(m)	E(lx)	D(cm)
1	3719	37
2	930	74
3	413	112
4	233	149



h(m)	E(lx)	D(cm)
1	1668	62
2	417	125
3	185	187
4	104	249



h(m)	E(lx)	U(cm)
1	1308	75
2	327	151
3	145	226
4	82	301