

# RECESSED MOUNTED SPOTLIGHT


COMMERCIAL

DEEPA®



DP-RMSC-FR25-2

## Product Dimension

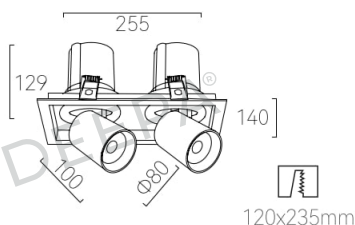

## FORCE

### Luminaire Information

|                      |                                   |
|----------------------|-----------------------------------|
| System power         | 2*25W                             |
| CCT                  | 2700K, 3000K, 3500K, 4000K, 5000K |
| CRI / Ra             | ±90Ra / ±95Ra                     |
| Fixture lumen output | 2*2100lm                          |
| Material             | Aluminum                          |
| Surface finish       | Textured powder coating           |
| Optics               | Lens (15°, 24°, 36°, 45°)         |
| UGR level            | <19                               |
| Installation         | Recessed                          |
| IP rate              | IP20                              |
| Fixture              | Adjustable                        |

### Light Engine Information

|             |                 |
|-------------|-----------------|
| LED type    | COB             |
| LED voltage | 36V             |
| SDCM        | 2 SDCM / 3 SDCM |

### Driver Information

|                |                                           |
|----------------|-------------------------------------------|
| Driver type    | Remote                                    |
| Input voltage  | 220-240 VAC                               |
| Output voltage | 30-42 VDC                                 |
| Output current | 2*600mA                                   |
| Dimming system | ON-OFF / TRIAC / 1-10V / DALI / BLUETOOTH |

## Color Option



Black White

## Light Throw

DP-RMSC-FR25-2 3000K 90Ra

| h(m) | E(lx) | D(cm) |
|------|-------|-------|
| 1    | 8842  | 27    |
| 2    | 2210  | 54    |
| 3    | 982   | 80    |
| 4    | 553   | 107   |

| h(m) | E(lx) | D(cm) |
|------|-------|-------|
| 1    | 6720  | 48    |
| 2    | 1680  | 96    |
| 3    | 747   | 144   |
| 4    | 420   | 192   |

| h(m) | E(lx) | D(cm) |
|------|-------|-------|
| 1    | 3820  | 60    |
| 2    | 955   | 120   |
| 3    | 424   | 180   |
| 4    | 239   | 240   |

| h(m) | E(lx) | D(cm) |
|------|-------|-------|
| 1    | 2026  | 84    |
| 2    | 507   | 168   |
| 3    | 225   | 252   |
| 4    | 127   | 336   |