

RECESSED MOUNTED SPOTLIGHT


COMMERCIAL

DEEPA®



DP-RMSC-FR25-3

Product Dimension

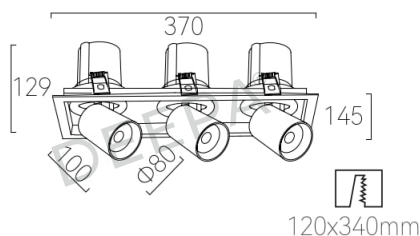

FORCE

Luminaire Information

System power	3*25W
CCT	2700K, 3000K, 3500K, 4000K, 5000K
CRI / Ra	±90Ra / ±95Ra
Fixture lumen output	3*2100lm
Material	Aluminum
Surface finish	Textured powder coating
Optics	Lens (15°, 24°, 36°, 45°)
UGR level	<19
Installation	Recessed
IP rate	IP20
Fixture	Adjustable

Light Engine Information

LED type	COB
LED voltage	36V
SDCM	2 SDCM / 3 SDCM

Driver Information

Driver type	Remote
Input voltage	220-240 VAC
Output voltage	30-42 VDC
Output current	3*600mA
Dimming system	ON-OFF / TRIAC / 1-10V / DALI / BLUETOOTH

Color Option




Black White

Light Throw


DP-RMSC-FR25-3

3000K 90Ra


	h(m)	E(lx)	D(cm)
1	8842	27	
2	2210	54	
3	982	80	
4	553	107	



	h(m)	E(lx)	D(cm)
1	6720	48	
2	1680	96	
3	747	144	
4	420	192	



	h(m)	E(lx)	D(cm)
1	3820	60	
2	955	120	
3	424	180	
4	239	240	



	h(m)	E(lx)	D(cm)
1	2026	84	
2	507	168	
3	225	252	
4	127	336	

