




DP-RMLC-LCC30

## LUCCI COMMERCIAL

### Luminaire Information

System power	30W
CCT	2700K, 3000K, 3500K, 4000K, 5000K
CRI / Ra	±90Ra
Fixture lumen output	2250lm
Material	Aluminum
Surface finish	Powder coating
Optics	Lens (15°, 30°, 45°)
UGR level	<19
Installation	Recessed
IP rate	IP20
Fixture	Fixed

### Product Dimension

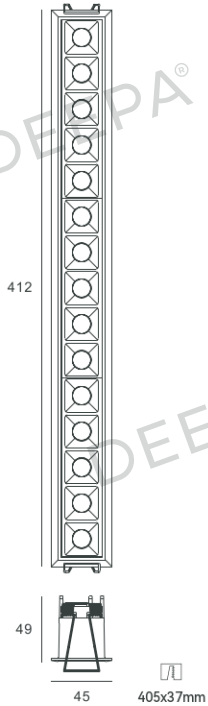

### Light Engine Information

LED type	SMD 2835
LED voltage	45V
SDCM	3 SDCM / 5 SDCM

### Driver Information

Driver type	Remote
Input voltage	220-240 VAC
Output voltage	42-48 VDC
Output current	700mA
Dimming system	ON-OFF / TRIAC / 1-10V / DALI / BLE / ZIGBEE

### Color Option



### Light Throw

