




DP-TSMC-LCC12

LUCCI COMMERCIAL

Luminaire Information

System power	12W
CCT	3000K, 4000K, 6000K
CRI / Ra	±90Ra
Fixture lumen output	1080lm
Material	Aluminum
Surface finish	Powder coating
Optics	Reflector (24°)
UGR level	<21
Installation	Track mounted
IP rate	IP20
Fixture	Fixed

Product Dimension

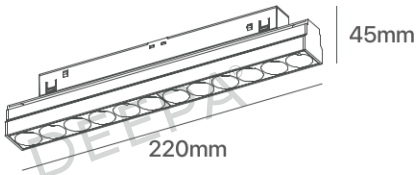

Light Engine Information

LED type	COB (Bridgelux)
LED voltage	36V
SDCM	2 SDCM / 3 SDCM

Driver Information

Driver type	Remote
Input voltage	48 VDC
Output voltage	30-42 VDC
Output current	300mA
Dimming system	NON-DIMM

Color Option




Black


Light Throw

DP-TSMC-LSC12 3000K 90Ra

h(m)	E(lx)	D(cm)
1	2445	42
2	611	85
3	271	128
4	152	170



h(m)	E(lx)	D(cm)
1	1549	63
2	387	127
3	172	191
4	96	255



DEEPA®

DEEPA®

DEEPA®

DEEPA®