




DP-SMP-PNT6

POINTER

Luminaire Information

System power	6W
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 6000K, TW
CRI / Ra	±95Ra
Fixture lumen output	300lm
Material	Aluminum
Surface finish	Textured powder coating
Optics	Lens (24°, 36°, 45°)
UGR level	<19
Installation	Surface mounted
IP rate	IP20

Product Dimension

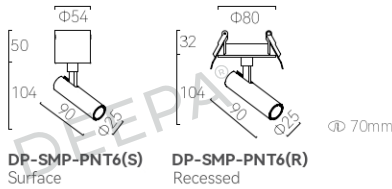

Light Engine Information

LED type	COB (Bridgelux)
LED voltage	36V
SDCM	2 SDCM / 3 SDCM

Driver Information

Driver type	Built-in driver
Input voltage	220-240 VAC
Output voltage	30-42 VDC
Output current	150mA
Dimming system	ON-OFF / TRIAC

Color Option



Light Throw

DP-SMP-PNT6 3000K 90Ra

h(m)	E(lx)	D(cm)
1	784	49
2	196	98
3	87	148
4	49	197

h(m)	E(lx)	D(cm)
1	446	67
2	111	135
3	49	203
4	27	270

h(m)	E(lx)	D(cm)
1	253	83
2	63	166
3	28	250
4	15	333