




DP-SMP-PNT8

POINTER

Luminaire Information

System power	8W
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 6000K, TW
CRI / Ra	±95Ra
Fixture lumen output	720lm
Material	Aluminum
Surface finish	Textured powder coating
Optics	Lens (15°, 24°, 36°, 50°)
UGR level	<19
Installation	Surface mounted
IP rate	IP20

Product Dimension

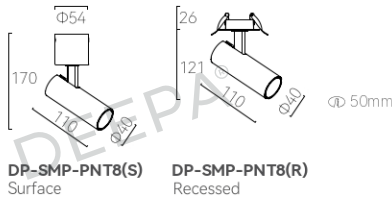

DP-SMP-PNT8(S)
Surface

DP-SMP-PNT8(R)
Recessed

Light Engine Information

LED type	COB (Bridgelux)
LED voltage	36V
SDCM	2 SDCM / 3 SDCM

Driver Information

Driver type	Built-in driver
Input voltage	220-240 VAC
Output voltage	30-42 VDC
Output current	180mA
Dimming system	ON-OFF / TRIAC

Color Option




Black White


Light Throw

DP-SMP-PNT8 3000K 90Ra


h(m)	E(lx)	D(cm)
1	4430	32
2	1107	65
3	492	97
4	276	130



h(m)	E(lx)	D(cm)
1	3598	39
2	899	78
3	399	117
4	224	156



h(m)	E(lx)	D(cm)
1	1969	57
2	492	115
3	218	172
4	123	230



h(m)	E(lx)	D(cm)
1	1328	79
2	332	159
3	147	239
4	83	319

