




DP-2835-SMD

Product Dimension

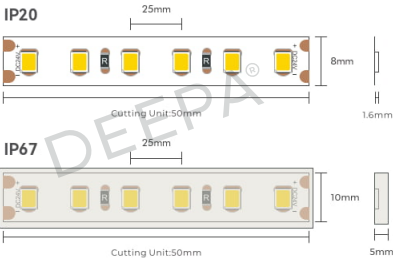

LED STRIPLIGHT SMD REGULAR CCT

Luminaire Information

|                      |                                          |
|----------------------|------------------------------------------|
| System power         | 4.8W / 7W / 12W / 14W                    |
| CCT                  | 2700K, 3000K, 3500K, 4000K, 5000K, 6500K |
| CRI / Ra             | ±90Ra                                    |
| Fixture lumen output | 1080lm, 1110lm, 1134lm, 1144lm, 1164lm   |
| Material             | PCB                                      |
| Beam angle           | 160°                                     |
| IP rate              | IP20, IP67                               |

Light Engine Information

|          |                 |
|----------|-----------------|
| LED type | SMD (Bridgelux) |
| SDCM     | 2 SDCM / 3 SDCM |

Driver Information

|                |                               |
|----------------|-------------------------------|
| Driver type    | Remote                        |
| Input voltage  | 12 VDC / 24VDC                |
| Dimming system | ON-OFF / TRIAC / 1-10V / DALI |

Accessories



Light Throw

