


DP-2835-SMD-TW

Product Dimension

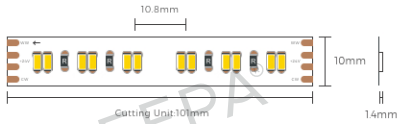

LED STRIPLIGHT SMD TUNABLE CCT

Luminaire Information

System power	7W / 12W
CCT	2700K - 6000K
CRI / Ra	±90Ra
Fixture lumen output	1080lm, 1110lm
Material	PCB
Beam angle	160°
IP rate	IP20, IP67

Light Engine Information

LED type	SMD (Bridgelux)
SDCM	2 SDCM / 3 SDCM

Driver Information

Driver type	Remote
Input voltage	12 VDC / 24VDC
Dimming system	ON-OFF / TRIAC / 1-10V / DALI

Light Throw

