



DPX-NF1213-TB (2) /  
DPX-NF1213-TB (3)

## LED NEONFLEX TOP BEND

### Luminaire Information

System power	6W / 10W / 12W
CCT	2200K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K / RGBW / TUNABLE CCT
CRI / Ra	±90Ra
Fixture lumen output	90lm, 93lm, 94lm, 95lm, 97lm
Material	PCB
Beam angle	160°
IP rate	IP65, IP44 (indoor only)



### Light Engine Information

LED type	SMD (Bridgelux)
SDCM	2 SDCM / 3 SDCM

### Driver Information

Driver type	Remote
Input voltage	12VDC / 24VDC
Dimming system	ON-OFF / TRIAC / 1-10V / DALI

### Product Dimension

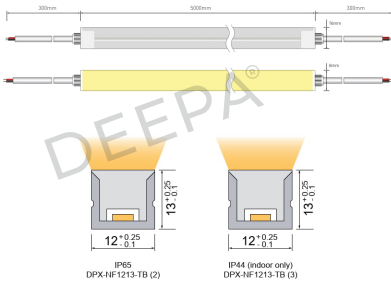

### Light Throw

