




**DP-RMSC-VN3**

## VENUS

### Luminaire Information

System power	3*23W / 3*32W
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 6000K, TW
CRI / Ra	±90Ra
Fixture lumen output	3*2550lm @23W / 3*3300lm @32W
Material	Aluminum
Surface finish	Powder coating
Optics	Reflector (15°, 24°, 36°, 50°)
UGR level	<17
Installation	Recessed
IP rate	IP20

### Product Dimension

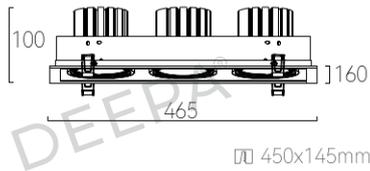

### Light Engine Information

LED type	COB (Bridgelux)
LED voltage	36V
SDCM	2 SDCM / 3 SDCM

### Driver Information

Driver type	Remote
Input voltage	220-240 VAC
Output voltage	30-42 VDC
Output current	3*600mA / 3*800mA
Dimming system	ON-OFF / TRIAC / 1-10V / DALI

### Light Throw

DP-RMSC-VN3 3000K 90Ra

